


SPECIFICATION

CONSTRUCTION & DIMENSION

Conductor	Material:	CCA
	Size:	24AWG*4P
	Construction:	1/0.56±0.01MM
Insulation	Material:	PE
	Avg. Thickness:	0.19MM
	Min. Thickness:	0.18MM
	Diameter:	0.95±0.03MM
Inner Layer	Direction:	S
	Pitch:	25mm underneath
Outside Layer	Direction:	S
	Pitch:	180mm underneath
Separate	Material:	Polyethylene
	Construction:	4.0×4.0×0.4mm
Shielding	Material:	/
	Coverage:	/
	Drain Wire:	/
	Material:	/
	Coverage:	/
Filler	Material:	Nylon
Jacket	Material:	PVC
	Avg. Thickness:	0.55MM
	Min. Thickness:	0.48MM
	Diameter:	Optional
	Color:	6.0±0.20mm
Marking	Optional	
Packing	Optional	

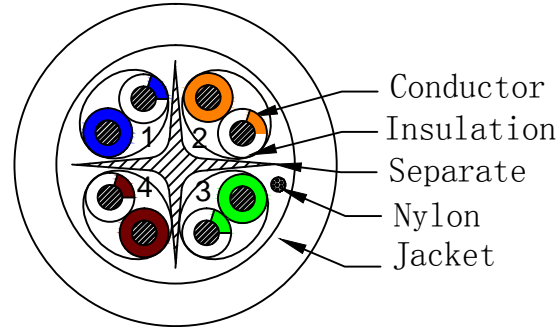

Insulation Color / 绝缘颜色:

1. Blue&White/Blue
2. Orange&White/Orange
3. Green&White/Green
4. Brown&White/Brown

CROSS-SECTION

ELECTRICAL PROPERTIES

Solid conductor resistance	:	≤15Ω/100M at 20℃
Insulation Resistance	:	Min. 5000mega ohms-km at 20℃
Dielectric Test	:	1000V DC/1min; No Breakdown

DESCRIPTION

Rating Temperature	:	60℃
Voltage Rati	:	30V

Description: LAN CABLE CAT 6 UTP 1/0.56CCA * 4P PVC					
Customer :				Drawing NO. : N1609280002	
Drawing	Yang	2016.09.28	UNIT:MM	REV. :A	PART NO. :
Checked					
Approved					